

**MiBOXER<sup>®</sup>** | **Mi·Light**  
Subordinate New Brand

**12W RGB+CCT LED Bulb (Zigbee 3.0)**

Model No.: FUT105Z

## Features

This item supports zigbee 3.0 standard protocol with low consumption, strong ability to pair with network automatically and resist interference. It's made by best aluminum material with heat dissipation. The bulb have unique apperance with 220° wide beam angle. User can use zigbee wireless remote to dim light. It supports to pair with zigbee gateway and enjoy the function (wireless dimmable, remote control, timmer, group control and music rhythm)



16 Millions of colors to choose



Color temperature  
2700K~6500K



Dim brightness



Product follow Zigbee 3.0 standard protocol



Zigbee remote control



Smartphone APP control  
(Zigbee 3.0 gateway is needed)



Support third party voice control  
(Zigbee 3.0 gateway is needed)

## Parameters

Model No: FUT105Z

Voltage: AC100~240V 50/60Hz

Power: 12W

Working Temp.: -10~40°C

Color Temp.: 2700K~6500K

Control Distance: 100m (open area)

CRI: >80


PF: >0.5

Lifespan: 50000 Hours

Beam angle: 220°

Light Efficiency: 90LM/W


Luminous Flux: 1100LM

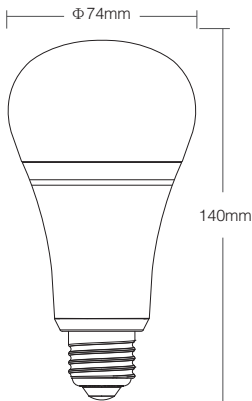

# How to control the light via phone APP?

**Please add zigbee 3.0 gateway to [ MiBoxer Smart ] APP firstly**

1. Connect with power supply.
2. Turn on/off light continuously over 3 times , confirm the light with red color in breathe ambience.
3. Open [ **MiBoxer Smart** ] APP and add sub-device ( see following screenshot).
4. You can dim light,group control and ambience control after adding device completely.

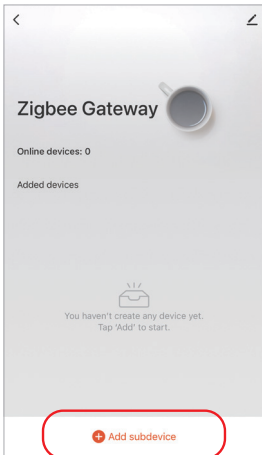

# Match and Dismatch with zigbee remote

stay closer distance between the gateway and remote

Remote	Light
The remote doesn't pair with zigbee gateway	Support match and mismatch light
The remote paired with zigbee gateway	Only support match and mismatch light which connected with same gateway

## Instruction of Matching

1. Connect with power supply.
2. Ensure the light is always on ( please wait 5 seconds and turn off, turn on again 1 time if the light is in red color with breathe ambience).
3. Long press group control " **I** " button with 3 seconds until the indicator of remote flash quickly ( check details in remote instruction).
4. Please keep closer for remote and the light which you want to connect ( within 1 meter).
5. Matching is done if the light breathe 3 times.

## Instruction of Dismatching

1. Connect with power supply.
2. Ensure the light is always on.
3. Long press group control " **O** " button with 3 seconds until the indicator of remote flash slowly ( check details in remote instruction).
4. Please keep closer for remote and the light which you want to connect ( within 1 meter).
5. Dismatching is done if the light breathe 3 times.

**Please repeat above steps if you are failed**

## **Attention**

1. Remote only match or mismatch with one light in one time, it will match or mismatch with the nearest light since the light identify light by nearest signal.
2. Remote doesn't pair with gateway: one lampe is only controlled by one remote.
3. Lamp doesn't pair with gateway: it can not be controlled by remote which already paired with gateway.
4. One light can be controlled by many remotes if remote and light both connected with gateway. (the max quantity for remote and light is based on max gateway which is connected).

## **Please repeat above steps if you are failed**

1. Ensure voltage is AC100~240V.
2. Please turn off power supply while install the light.
3. Stay away from high temperature and moist area.



**Made in China**